




Monarch

Renlita Overhead Doors®

SERIES 1 & 2 ALUMINIUM

Strong Functional Security - All Round Protection

Designed for serious security, the Series 1 & Series 2 Commercial Shutters offer exceptional protection, strong functional security and aesthetic appeal. Your choice for complete block out design or to maintain airflow or visibility. Both available in a wide range of designs and colors to suit your brand image.

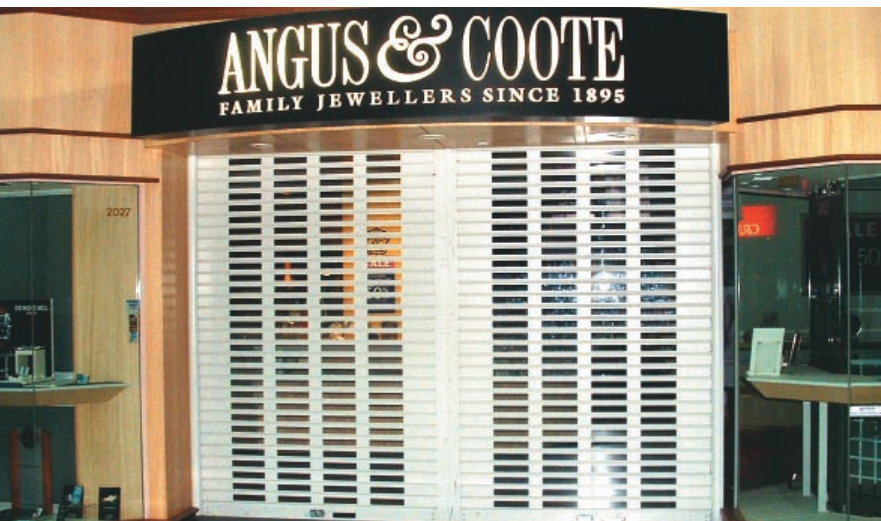

Applications:

The Series 1 & 2 Aluminium Shutter is suitable for many commercial applications including the following:

- Shopping centers
- Bar tops
- Store fronts
- Sports complexes
- Arcades
- Countertops
- Doorways
- Clubs

Opening sizes up to - 196.9" wide
157.5" high

Specifications:

Curtain - SERIES 1 is constructed from extruded aluminium slats with a face depth of 2.4" x 0.06" thick. Optional slotting of 3.9" x 1.0".

Curtain - SERIES 2 is as the above details with a face depth of 2.9" x 0.06". Nylon end clips shall be fitted to alternate slats to prevent lateral movement and provide smooth operation, free from lubrication. Optional slotting of 8.8" x 1.6" or perforations of 0.2" holes at 0.4" centres are available to any number of slats.

Clear vision panels of acrylic or polycarbonate can be fitted to the slotted slots providing a dust seal.

Slide Guide - 2.0" x 1.3" extruded aluminium with false back for concealed fixing. Optional Nylofelt Buffer available.

Locking - Shall be centrally mounted, two way Mortice Key Lock or Sliding Shoot Bolt locking, mounted within the bottom rail. Optional waist high locking is also available.

Bottom Rail - 3.5" x 1.9" extruded aluminium section incorporating locking device and concealed locking rods and optional PVC buffer.

Brackets - Manufactured from 3.5" x 1.6" mild steel.

Roller Drum - Manufactured from 9" spiral ducted tube attached to ball bearing drum wheels rotating on a 1.3" steel shaft. The shaft shall be fitted with helical springs designed to counter-balance the curtain weight throughout its operation. The drum shall be designed to give minimum deflection over the span.

Mullions - Specially designed one piece extrusion for straight openings and two piece sections that can be set to any angle and shall be used for wide openings and multiple door installations. Mullions shall be lift out type with shoot bolts to base.

Special wide mullions fabricated from aluminium sheet shall be used when two doors meet at an acute angle and no headroom exists for different mounting heights of doors (stacking).

Finish - Anodized and powder coat colors.

Operation - Available in manual or motorized operation.



Contact Details

Renlita Doors North America, LLC

Mailing Address: P.O. Box B, Bonham, TX 75418

Shipping Address: 220 E First St, Bonham, TX 75418

Phone: 903-583-7500 | Fax: 903-583-7544

Renlita Doors North America, LLC is a licensee of The ARA Group.

Renlita Doors New York City

Metro Area Representative: Susan Oliner, Harrison Leigh, LLC

5 Manor Lane, East Hampton, NY 11937

Phone: 973-477-3886 | Fax: 631-324-3577

Renlita Doors Canada

57 Luella Blvd, Minesing, Ontario L0L 1Y2

Phone: 705-828-0845 | Fax: 705-737-2624

Visit our website: www.renlitadoors.com